



# ROHS

Pin No.	Length	Width
1x1	-	1.27
1x2	1.27	2.54
1x3	2.54	3.81
1x4	3.81	5.08
1x5	5.08	6.35
1x6	6.35	7.62
1x7	7.62	8.89
1x8	8.89	10.16
1x9	10.16	11.43
1x10	11.43	12.70
1x11	12.70	13.97
1x12	13.97	15.24
1x13	15.24	16.51
1x14	16.51	17.78
1x15	17.78	19.05
1x16	19.05	20.32
1x17	20.32	21.59
1x18	21.59	22.86
1x19	22.86	24.13
1x20	24.13	25.40
1x21	25.40	26.67
1x22	26.67	27.94
1x23	27.94	29.21
1x24	29.21	30.48
1x25	30.48	31.75
1x26	31.75	33.02
1x27	33.02	34.29
1x28	34.29	35.56
1x29	35.56	36.83
1x30	36.83	38.10
1x31	38.10	39.37
1x32	39.37	40.64
1x33	40.64	41.91
1x34	41.91	43.18
1x35	43.18	44.45
1x36	44.45	45.72
1x37	45.72	46.99
1x38	46.99	48.26
1x39	48.26	49.53
1x40	49.53	50.80
1x41	50.80	52.07
1x42	52.07	53.34
1x43	53.34	54.61
1x44	54.61	55.88
1x45	55.88	57.15
1x46	57.15	58.42
1x47	58.42	59.69
1x48	59.69	60.96
1x49	60.96	62.23
1x50	62.23	63.50

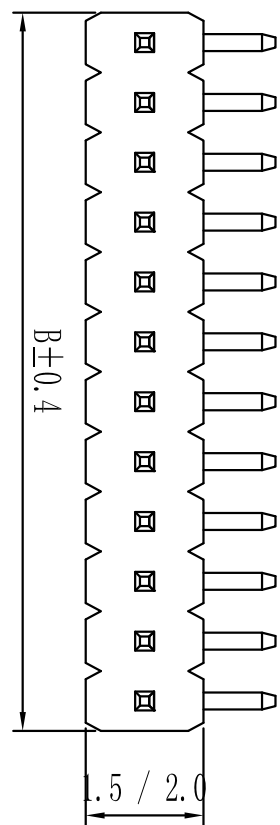

SQ
0.40
0.46

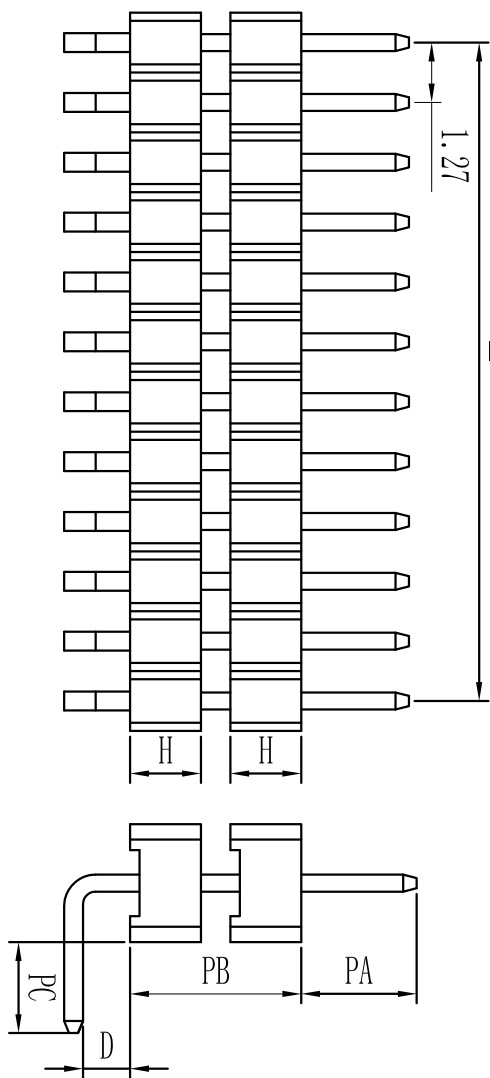

PCB LAYOUT

Specification:  
 Current Rating : 1AMP  
 Temperature Range : -40°C to +105°C  
 Contact Resistance : 20mΩ Max  
 Insulation Resistance : 1000MΩ Min  
 Withstanding Voltage : AC 500V  
 Material :  
 Insulator : Polyester (UL94V-0)  
 Standard: PBT/PA6T/LCP  
 Contact: Brass  
 Plating : Au or Sn Over 50u" Ni

Height
H=0.65mm, 1.0mm, 1.5mm, 1.7mm, 2.0mm, 2.5mm

GENERAL TOLERANCES		SCALES:		NAME	DATE
LINEAR	ANGLES	1:1	APPROVED		
0.0 ± 0.25	X° REF ± 6°		DESIGNER		
0.00 ± 0.15	X° ± 3°		DRAWN		
UNIT: MM		SIZE: A4			
REVISION RECORD		DATE	SIZE: A4	X° X' ± 2°	
1	2	3	4	5	6
REV. 1		REVISION RECORD	DATE	SIZE: A4	X° X' ± 2°

**深圳市联泰连接器有限公司**  
**SHENZHEN UNICABLE CONNECTOR CO., LTD.**  
 公司地址: WWW.SZLSTC.COM  
 公司邮箱: SZLSTC@126.COM  
 公司电话: 0755-23765650  
 公司传真: 0755-23765753

TITLE: Pitch 1.27mm Pin Header, Dual Plastic, Single Row, Right Angle Type

PART. NO:	LSPH-0024
DWG. NO:	ENDE0024
REV:	A0
SHEET:	1/1

For reference only