
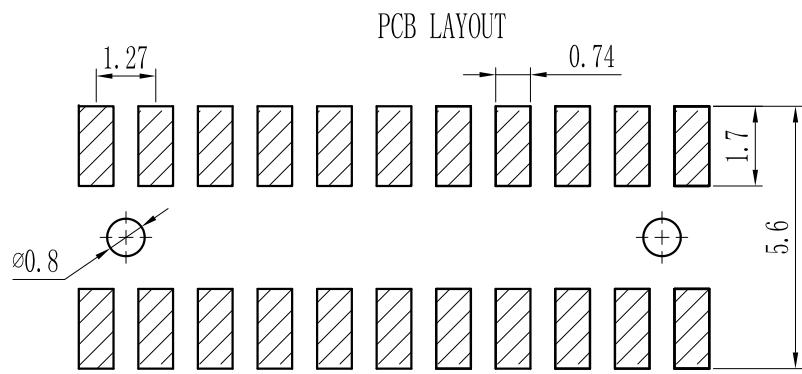


ROHS

For reference only

| Pin数 | 尺寸A | 尺寸B |
|------|-------|-------|
| 2×2 | 1.27 | 2.94 |
| 2×3 | 2.54 | 4.21 |
| 2×4 | 3.81 | 5.48 |
| 2×5 | 5.08 | 6.75 |
| 2×6 | 6.35 | 8.02 |
| 2×7 | 7.62 | 9.29 |
| 2×8 | 8.89 | 10.56 |
| 2×9 | 10.16 | 11.83 |
| 2×10 | 11.43 | 13.10 |
| 2×11 | 12.70 | 14.37 |
| 2×12 | 13.97 | 15.64 |
| 2×13 | 15.24 | 16.91 |
| 2×14 | 16.51 | 18.18 |
| 2×15 | 17.78 | 19.45 |
| 2×16 | 19.05 | 20.72 |
| 2×17 | 20.32 | 21.99 |
| 2×18 | 21.59 | 23.26 |
| 2×19 | 22.86 | 24.53 |
| 2×20 | 24.13 | 25.80 |
| 2×21 | 25.40 | 27.07 |
| 2×22 | 26.67 | 28.34 |
| 2×23 | 27.94 | 29.61 |
| 2×24 | 29.21 | 30.88 |
| 2×25 | 30.48 | 32.15 |
| 2×26 | 31.75 | 33.42 |
| 2×27 | 33.02 | 34.69 |
| 2×28 | 34.29 | 35.96 |
| 2×29 | 35.56 | 37.23 |
| 2×30 | 36.83 | 38.50 |
| 2×31 | 38.10 | 39.77 |
| 2×32 | 39.37 | 41.04 |
| 2×33 | 40.64 | 42.31 |
| 2×34 | 41.91 | 43.58 |
| 2×35 | 43.18 | 44.85 |
| 2×36 | 44.45 | 46.12 |
| 2×37 | 45.72 | 47.39 |
| 2×38 | 46.99 | 48.66 |
| 2×39 | 48.26 | 49.93 |
| 2×40 | 49.53 | 51.20 |
| 2×41 | 50.80 | 52.47 |
| 2×42 | 52.07 | 53.74 |
| 2×43 | 53.34 | 55.01 |
| 2×44 | 54.61 | 56.28 |
| 2×45 | 55.88 | 57.55 |
| 2×46 | 57.15 | 58.82 |
| 2×47 | 58.42 | 60.09 |
| 2×48 | 59.69 | 61.36 |
| 2×49 | 60.96 | 62.63 |
| 2×50 | 62.23 | 63.90 |

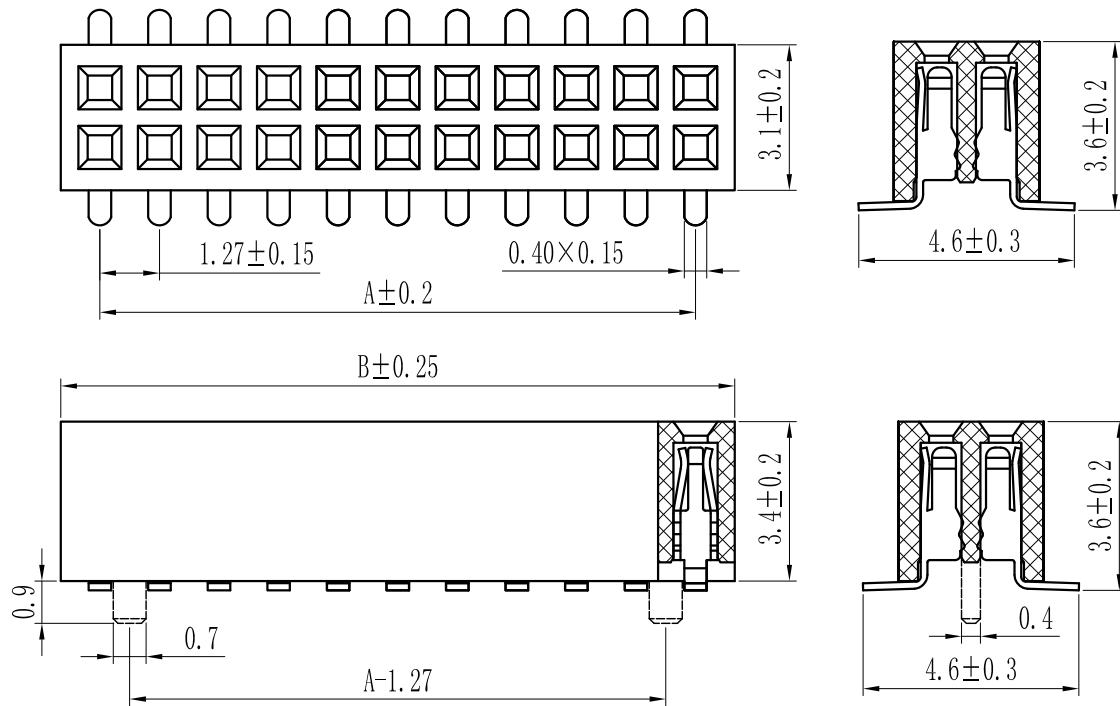

Specification:
 Current Rating : 1AMP
 Temperature Range : -40°Cto+105°C
 Contact Resistance : 20mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstanding Voltage : AC 500V
 Material:
 Insulator : Polyester (UL94V-0)
 Standard:PA6T/LCP
 Contact: Bronze
 Plating : Au or Sn Over 50u" Ni

| REV. | REVISION RECORD | DATE | UNIT: MM | GENERAL TOLERANCES | | SCALE: 1:1 | NAME | DATE | 深圳市联索连接器有限公司 SHENZHEN UNICABLE CONNECTOR CO., LTD. 公司网址WWW.SZLSTC.CN 公司电话0755-23765650 公司邮箱SZLSTC@126.COM 公司传真0755-23765753 | PART. NO: | | |
|------|-----------------|------|----------|--------------------|-----------|------------|------|------|--|--|---------|------------|
| | | | | LINEAR | ANGLES | | | | | LSFH-0032 | | |
| | | | | 0.0±0.25 | X° REF±6° | APPROVED | | | | DWG. NO: | | |
| | | | | 0.00±0.15 | X° ±3° | DESIGNER | | | | ENDE1032 | | |
| | | | | 0.000±0.08 | X° X'±2° | DRAWN | | | | TITLE: Pitch1.27mm Female Header, Dual Row, Plastic Height 3.4mm, SMT (with Local Peg) Type(U) | REV: A0 | SHEET: 1/1 |