

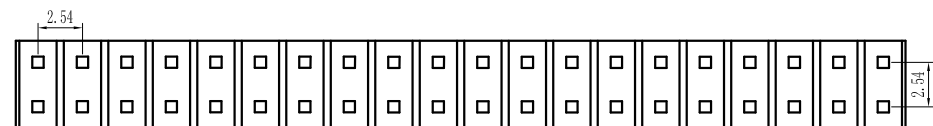
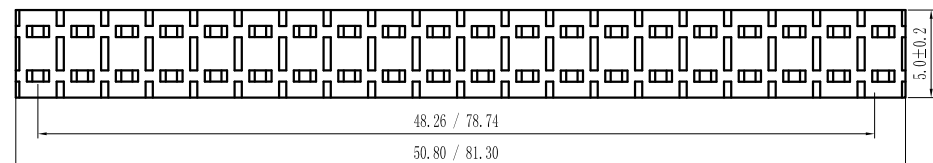
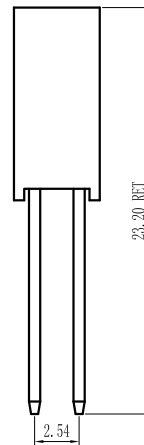
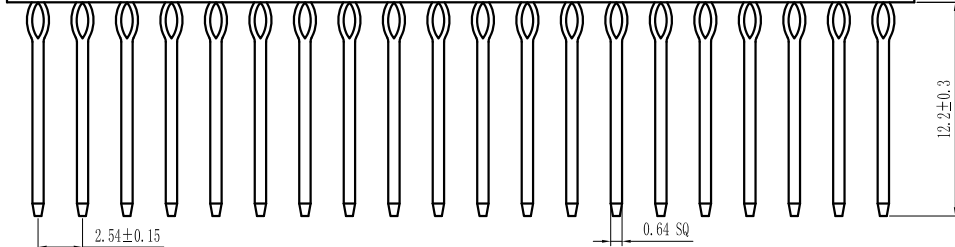



ROHS

For reference only



Specification:

Current Rating : 3AMP

Temperature Range : -40°C to +105°C

Contact Resistance : 20mΩ Max

Insulation Resistance : 1000MΩ Min

Withstanding Voltage : AC 1000V

Material:

Insulator : Polyester (UL94V-0)

Standard: PBT/PA6T/LCP

Contact: Brass

Plating : Au or Sn Over 50u" Ni



GENERAL TOLERANCES

SCALE:
1:1

NAME

DATE

LINEAR

ANGLES

APPROVED

0.00 ± 0.15

X° REF ± 6°

DESIGNER

0.000 ± 0.08

X° X' ± 2°

DRAWN

深圳市联索连接器有限公司
SHENZHEN UNICABLE CONNECTOR CO., LTD.

公司网址 WWW.SZLSTC.CN
公司邮箱 SZLSTC@126.COM

公司电话 0755-23765650
公司传真 0755-23765753

PART. NO:

LSFH-0212

DWG. NO:

ENDE1212

REV: A0

SHEET: 1/1

REVISION RECORD

DATE

UNIT: MM

SIZE: A4

0.000 ± 0.08

X° X' ± 2°

TITLE:
Pitch 2.54mm Female Header, Dual Row,
Plastic Height 11.0mm, DIP (PC104)