

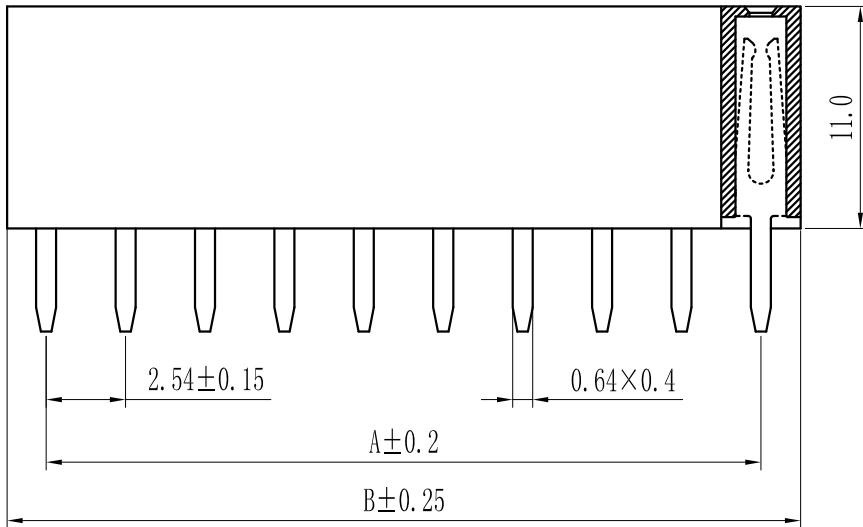


ROHS


For reference only

| Pin数 | 尺寸A | 尺寸B |
|------|-------|--------|
| 1×2 | 2.54 | 5.58 |
| 1×3 | 5.08 | 8.12 |
| 1×4 | 7.62 | 10.66 |
| 1×5 | 10.16 | 13.20 |
| 1×6 | 12.70 | 15.74 |
| 1×7 | 15.24 | 18.28 |
| 1×8 | 17.78 | 20.82 |
| 1×9 | 20.32 | 23.36 |
| 1×10 | 22.86 | 25.90 |
| 1×11 | 25.40 | 28.44 |
| 1×12 | 27.94 | 30.98 |
| 1×13 | 30.48 | 33.52 |
| 1×14 | 33.02 | 36.06 |
| 1×15 | 35.56 | 38.60 |
| 1×16 | 38.10 | 41.14 |
| 1×17 | 40.64 | 43.68 |
| 1×18 | 43.18 | 46.22 |
| 1×19 | 45.72 | 48.76 |
| 1×20 | 48.26 | 51.30 |
| 1×21 | 50.80 | 53.84 |
| 1×22 | 53.34 | 56.38 |
| 1×23 | 55.88 | 58.92 |
| 1×24 | 58.42 | 61.46 |
| 1×25 | 60.96 | 64.00 |
| 1×26 | 63.50 | 66.54 |
| 1×27 | 66.04 | 69.08 |
| 1×28 | 68.58 | 71.62 |
| 1×29 | 71.12 | 74.16 |
| 1×30 | 73.66 | 76.70 |
| 1×31 | 76.20 | 79.24 |
| 1×32 | 78.74 | 81.78 |
| 1×33 | 81.28 | 84.32 |
| 1×34 | 83.82 | 86.86 |
| 1×35 | 86.36 | 89.40 |
| 1×36 | 88.90 | 91.94 |
| 1×37 | 91.44 | 94.48 |
| 1×38 | 93.98 | 97.02 |
| 1×39 | 96.52 | 99.56 |
| 1×40 | 99.06 | 102.10 |



Specification:
 Current Rating : 3AMP
 Temperature Range : -40℃to+105℃
 Contact Resistance : 20mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstanding Voltage : AC 1000V
 Material:
 Insulator : Polyester (UL94V-0)
 Standard:PBT/PA6T/LCP
 Contact: Brass
 Plating : Au or Sn Over 50u" Ni

PCB LAYOUT

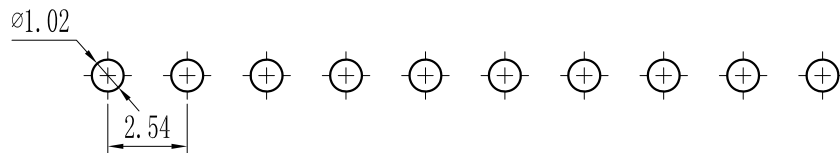

| | | | | | | | | | | | | | | |
|------|-----------------|--|------|----------|----------|--------------------|------------|----------|------|---|-----------|-----------|---|------------|
| REV. | REVISION RECORD | | DATE | UNIT: MM | SIZE: A4 | GENERAL TOLERANCES | SCALE: 1:1 | NAME | DATE | <p>深圳市联索连接器有限公司 SHENZHEN UNICABLE CONNECTOR CO., LTD. 公司网址WWW.SZLSTC.CN 公司电话0755-23765650 公司邮箱SZLSTC@126.COM 公司传真0755-23765753</p> | PART. NO: | LSFH-0194 | | |
| | | | | | | LINEAR | APPROVED | | | | DWG. NO: | ENDE1194 | | |
| | | | | | | | ANGLES | DESIGNER | | | | TITLE: | Pitch2.54mm Female Header, Single Row, Plastic Height 11.0mm, DIP (Y) | |
| | | | | | | | 0.00±0.15 | DRAWN | | | | REV: | AO | SHEET: 1/1 |
| | | | | | | 0.00±0.08 | | | | | | | | |