
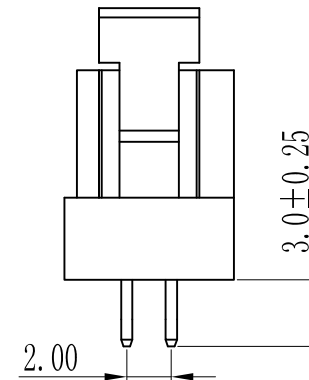
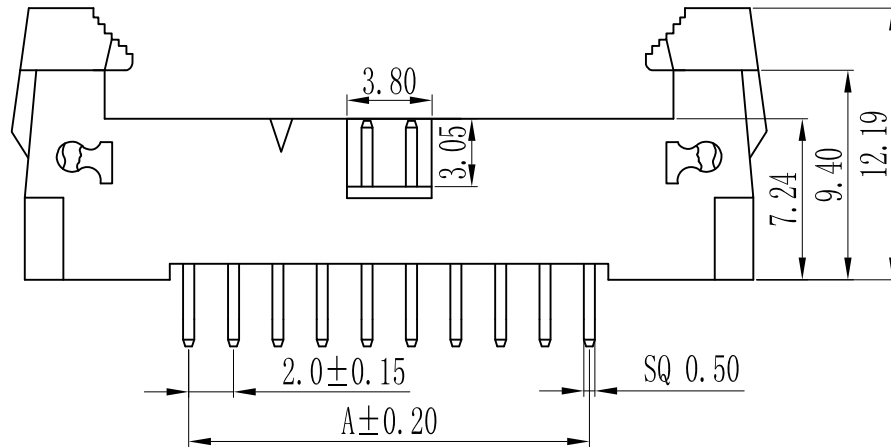



ROHS

For reference only

Pin数	尺寸A
2×6	10.00
2×8	14.00
2×10	18.00
2×12	22.00
2×14	26.00
2×16	30.00
2×18	34.00
2×20	38.00
2×22	42.00
2×24	46.00
2×26	50.00
2×28	54.00
2×30	58.00
2×32	62.00
2×34	66.00
2×36	70.00
2×38	74.00
2×40	78.00
2×42	82.00
2×44	86.00
2×46	90.00
2×48	94.00
2×50	98.00
2×52	102.00
2×54	106.00
2×56	110.00
2×58	114.00
2×60	118.00

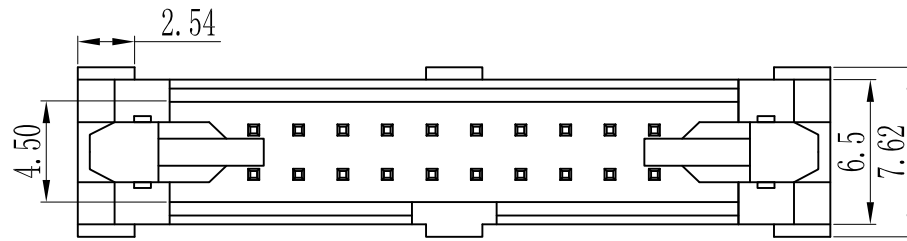

PCB LAYOUT

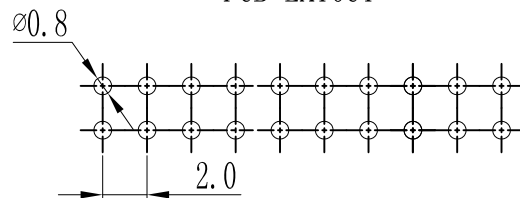

Specification:  
 Current Rating : 1.5AMP  
 Temperature Range : -40°Cto+105°C  
 Contact Resistance : 20mΩ Max  
 Insulation Resistance : 1000MΩ Min  
 Withstanding Voltage : AC 500V  
 Material:  
 Insulator : Polyester (UL94V-0)  
 Standard:PBT/PA6T/LCP  
 Contact: Brass  
 Plating : Au or Sn Over 50u" Ni

REV.	REVISION RECORD	DATE	UNIT: MM SIZE: A4	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市联索连接器有限公司 SHENZHEN UNICABLE CONNECTOR CO., LTD. 公司网址WWW.SZLSTC.CN 公司电话0755-23765650 公司邮箱SZLSTC@126.COM 公司传真0755-23765753	PART. NO: LSEH-0012-01	
				LINEAR 0.00±0.15	ANGLES X° REF±6° X° ±3°					APPROVED	DESIGNER
				0.00±0.08	X° X'±2°					TITLE: Pitch2.00mm Ejector Header, Dual Row, Plastic Height 7.24mm, DIP	REV: A0 SHEET: 1/1